



# B16.47 Series A Class 900 Weld Neck & Blind

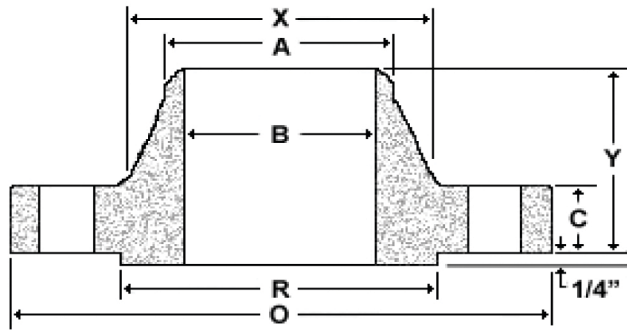

Weld Neck

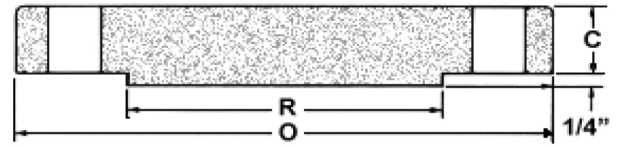

Blind

Nom Size	Thickness			OD of RF R	Dia at Base X	Bore B	LTH Y	Dia Bevel A	Bolt Circle	Bolt Length (1)	Hole Dia (2)	# of Holes	Weight	
	Weld Neck	Blind	OD of RF										Weld Neck	Blind
	O	C	C											
26	42.75	5.50	6.31	29.50	30.50	To be specified by Purchaser.	11.25	26.00	37.50	18.75	2.88	20	1525	2566
28	46.00	5.62	6.75	31.50	32.75		11.75	28.00	40.25	19.75	3.12	20	1810	3178
30	48.50	5.88	7.18	33.75	35.00		12.25	30.00	42.75	20.50	3.12	20	2120	3758
32	51.75	6.25	7.62	36.00	37.25		13.00	32.00	45.50	22.00	3.38	20	2545	4541
34	55.00	6.50	8.06	38.00	39.62		13.75	34.00	48.25	23.00	3.62	20	2970	5425
36	57.50	6.75	8.44	40.25	41.88		14.25	36.00	50.75	23.75	3.62	20	3395	6209
38	57.50	7.50	8.50	43.25	42.25		13.88	38.00	50.75	24.50	3.62	20	3385	6253
40	59.50	7.75	8.81	45.75	44.38		14.31	40.00	52.75	25.00	3.62	24	3620	6940
42	61.50	8.12	9.12	47.75	46.31		14.62	42.00	54.75	25.75	3.62	24	3960	7675
44	64.88	8.44	9.56	50.00	48.62		15.38	44.00	57.62	27.00	3.88	24	4300	8954
46	68.25	8.88	10.06	52.50	50.88		16.18	46.00	60.50	28.50	4.12	24	4640	10426
48	70.25	9.19	10.38	54.50	52.88		16.50	48.00	62.50	29.00	4.12	24	4980	11398

Dimensions are in inches. Weights are in pounds.

(1) Bolt lengths are calculated based on bolting one WN to one blind.

(2) Bolt diameter should be 1/8" less than the bolt hole diameter.

**Note:**

Larger sizes as well as intermediate sizes can be furnished.

**Mr. Bhavesh Choudhary**  
**+91 9619344811 / +91 9869161792**  
**remibhavesh@gmail.com**  
**www.remitubes.com**